Single-Setpoint Temperature Controller

TMP10

FEATURES
Low Voltage Operation (2.7 V to 5.5 V)
Calibrated Directly in °C
10 mV/°C Scale Factor
±3°C Accuracy Over Temperature
±0.5°C Linearity (typ)
Onboard 2.048 V Precision Reference
Programmable Comparator Hysteresis
Either 1°C, 2°C, or 5°C
Specified –40°C to +125°C, Operation to +150°C
100 μA Max Quiescent Current
Shutdown Current: 1 μA max

APPLICATIONS
Environmental Control Systems
Thermal Protection
Battery Chargers
Fire Alarms
Power System Monitors
Power Supplies
CPU Thermal Management

FUNCTIONAL BLOCK DIAGRAM

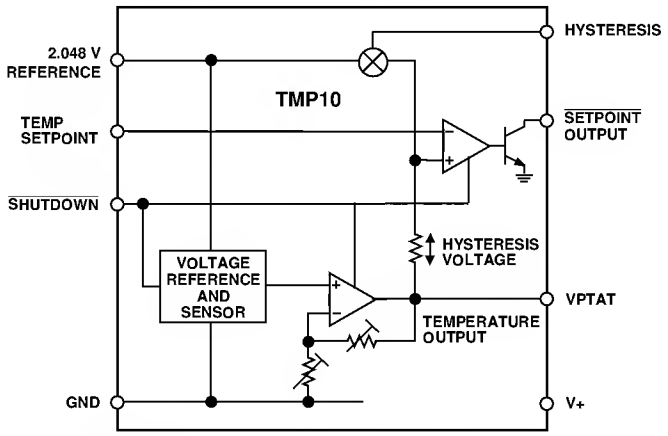

GENERAL DESCRIPTION

The TMP10 is a low voltage, precision, centigrade temperature sensor and controller. A voltage output that is linearly proportional to the Celsius (Centigrade) temperature, the VPTAT output, provides temperature measurement from –40°C to +125°C. The output scale factor is +10 mV/°C. The TMP10 does not require external calibration to provide typical accuracies of ±1°C at 25°C and ±2°C over the operating temperature range. An open-collector output comparator, and an onboard 2.048 V reference allow a single temperature setpoint to be established using two external resistors. One of three levels of thermal hysteresis, 1°C, 2°C, or 5°C, may be chosen for the temperature setpoint using the hysteresis pin. The hysteresis level is determined by connecting the hysteresis pin to: V_{REF}, GND, or leaving it floating. The TMP10 is designed for single supply operation from 2.7 V to 5.5 V. Supply current runs well below 100 μA providing very low self-heating, less than 0.1°C in still air. In addition, a shutdown function is provided to cut supply current to less than 1 μA for battery-powered applications. The TMP10 operates linearly up to +125°C from a single 2.7 V supply. Operation extends to +150°C with reduced accuracy when operating from a 5 V supply.

The TMP10 is available in 8-pin DIP, and SO-8 and TSSOP-8 surface-mount packages.

PIN CONFIGURATIONS

Plastic DIP, SO-8 and TSSOP-8 Packages

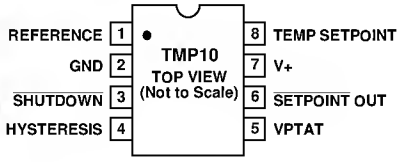

ORDERING GUIDE

Model	Accuracy at 25°C (°C max)	Linear Operating Temperature Range	Package Option*
TMP10FS	±2.0	–40°C to +125°C	SO-8
TMP10GS	±3.0	–40°C to +125°C	SO-8
TMP10GRU	±3.0	–40°C to +125°C	TSSOP-8
TMP10GP	±3.0	–40°C to +125°C	PDIP-8

*For outline information see Package Information section.

This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Analog Devices assumes no obligation regarding future manufacture unless otherwise agreed to in writing.

To obtain the most recent version or complete data sheet, call our fax retrieval system at 1-800-446-6212 or visit our World Wide Web site at http://www.analog.com.

TMP10– SPECIFICATIONS (V_S = +2.7 V to +5.5 V, –40°C ≤ T_A ≤ +125°C unless otherwise noted.)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
VPTAT ACCURACY						
TMP10F		T_A = +25°C		±1	±2	°C
TMP10G		T_A = +25°C		±1	±3	°C
TMP10F		Over Rated Temperature		±2	±3	°C
TMP10G		Over Rated Temperature		±2	±4	°C
VPTAT OUTPUT						
Scale Factor		Over Rated Temperature		+10	+9.8/+10.2	mV/°C
Nominal Output Voltage	VPTAT	T_A = –40°C		100		mV
Nominal Output Voltage	VPTAT	T_A = +25°C		750		mV
Nominal Output Voltage	VPTAT	T_A = +125°C		1750		mV
Output Voltage Range			100		2000	mV
Output Load Current	I_L	Over Rated Temperature	0		200	µA
Capacitive Load Driving	C_L	No Oscillations (Note 1)	1000	10,000		pF
Device Turn-On Time		Output within ±1°C 100 kΩ//100 pF Load		0.5	1	ms
Power Supply Rejection Ratio	PSRR	Over Rated Supply		0.5		°C/V
Nonlinearity		Over Rated Temperature		0.5		°C
Long-Term Stability		T_A = +125°C for 1 kHrs		0.1		°C
REFERENCE						
Output Voltage	V_{REF}	T_A = +25°C	2.040	2.048	2.056	V
Output Voltage	V_{REF}	Over Rated Temperature	2.036	2.048	2.060	V
Temperature Coefficient	TC	Over Rated Temperature		15		ppm/°C
Output Current	I_{REF}	Over Rated Temperature			25	µA
COMPARATOR						
Offset Voltage	V_{OS}	T_A = +25°C		1		mV
Input Bias Current	I_B	T_A = +25°C		10	25	nA
Open-Collector Output	V_{OUT}	Over Rated Temperature I_{LOAD} = 400 µA			0.4	V
Open-Collector Output	I_{OUT}	Over Rated Temperature	0.5	1		mA
Hysteresis		Low		1		°C
		Medium		2		°C
		High		5		°C
SHUTDOWN INPUT						
Input High Voltage	V_{IH}	V_S = 2.7 V	1.8			V
Input Low Voltage	V_{IL}	V_S = 5.5 V			800	mV
POWER SUPPLY						
Supply Range	$+V_S$		2.7		5.5	V
Supply Current	I_{SY}	Unloaded at +5.5 V			100	µA
Shutdown Current	I_{SD}	Unloaded at +5.5 V		0.1	1	µA

Specifications subject to change without notice.

This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Analog Devices assumes no obligation regarding future manufacture unless otherwise agreed to in writing.